

10/520578

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number
WO 2004/007122 A1

(51) International Patent Classification⁷: **B22D 37/00**,
11/10

(21) International Application Number:
PCT/EP2003/007240

(22) International Filing Date: 7 July 2003 (07.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
MI2002A001508 10 July 2002 (10.07.2002) IT

(71) Applicant (for all designated States except US): **DANIELI
& C. OFFICINE MECCANICHE S.P.A.** [IT/IT]; Via
Nazionale, 41, I-33042 Buttrio (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BOTHAM, W.,**

Brian [GB/GB]; The Croft, 1130, Town Street, Lound,
Retford, Nottinghamshire DN22 8SA (GB). **ZOMERO,**
Gianni [IT/IT]; Via Alpi, 22, I-33030 Pasian di Prato (IT).
DE LUCA, Andrea [IT/IT]; Via Malignani, 13/6, I-33047
Remanzacco (IT).


(74) Agent: **GERVASI, Gemma**; Notarbatolo & Gervasi
S.p.A., Corso di Porta Vittoria, 9, I-20122 Milan (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: **DEVICE FOR DISCHARGING MOLTEN METAL FROM A CONTAINER**

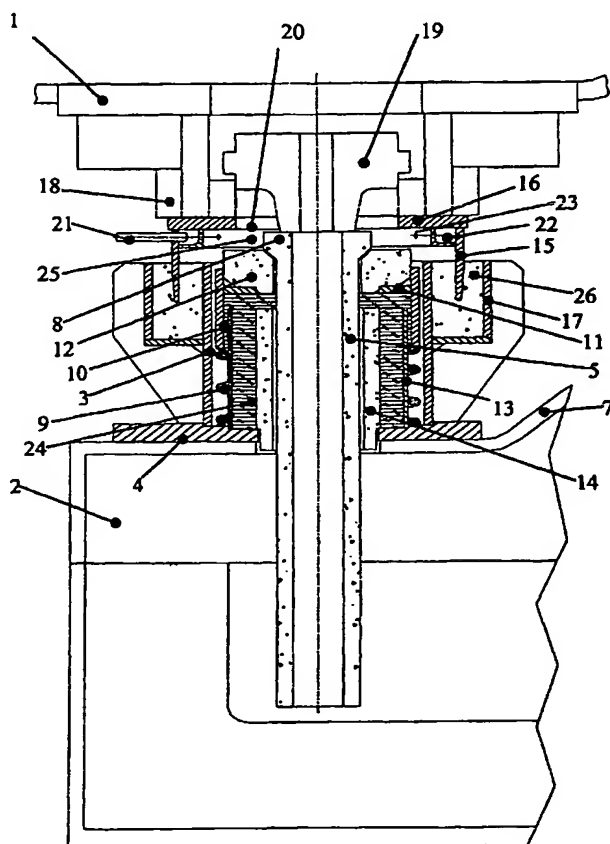

(57) Abstract: A device for discharging molten metal from a container to another, comprising an outlet sleeve which penetrates into the lower container pushed by springs against a nozzle of refractory material which connects the inside of the upper container with the outside, so as to make a seal for the molten metal. The outlet sleeve is surrounded by a cylindrical sheath which joins, through a sand joint with a cylindrical blade fixed to the base of the upper container, around the aperture where it faces the nozzle. The sheath and the blade enclose a volume into which an inert gas is injected to remove the air possibly present.

WO 2004/007122 A1



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.